



TOYOHASHI UNIVERSITY of TECHNOLOGY

Hibarigaoka, Tempaku, Toyohashi, Aichi, 441-8580 Japan
PHONE: +81-532-44-6577 FAX: +81-532-44-6557
E-mail: press@office.tut.ac.jp

PRESS RELEASE

Source: Toyohashi University of Technology, Japan, Committee for Public Relations

Title: Intracellular recordings using nanotower electrodes

Subtitle: Nanoscale-tipped high-aspect-ratio vertical microneedle electrodes for intracellular recordings

Full text:

Our current understanding of how the brain works is very poor. The electrical signals travel around the brain and throughout the body, and the electrical properties of the biological tissues are studied using electrophysiology. For acquiring a large amplitude and a high quality of neuronal signals, intracellular recording is a powerful methodology compared to extracellular recording to measure the voltage or current across the cell membranes. Nanowire- and nanotube- based devices have been developed for the intracellular recording applications to demonstrate the advantages of these devices having high spatial resolution and high sensitivity.

However, length of these nanowire/nanotube electrode devices is currently limited to less than 10 μm due to process issues that occur during fabrication of high-aspect-ratio nanoscale devices, which are more than 10- μm long. Thus, conventional nanodevices are not applicable to neurons/cells within thick biological tissues, including brain slices and brain in vivo.

A research team in the Department of Electrical and Electronic Information Engineering and the Electronics-Inspired Interdisciplinary Research Institute (EIIRIS) at Toyohashi University of Technology has developed three-dimensional microneedle-based nanoscale-tipped electrodes (NTEs) that are longer than 100 μm . The needle length exceeds that of the conventional nanowire/nanotube-based intracellular devices, thus expanding the range of applications of nanodevices in intracellular recording, such as deep tissue penetration. Additionally, they perform intracellular recordings using muscle cells.

“A technological challenge in electrophysiology is intracellular recordings within a thick biological tissue. For example, a needle length of more than 40 μm is necessary for performing brain slice experiments. However, it is almost impossible to penetrate nanoscale diameter needles with a high-aspect-ratio, because of the long hair-like nanostructure that has insufficient stiffness. On the other hand, our NTE, which is 120- μm -long cone-shaped electrode, has sufficient stiffness to punch tissues and cells”, explains the first author PhD candidate, Yoshihiro Kubota.



TOYOHASHI UNIVERSITY of TECHNOLOGY

Hibarigaoka, Tempaku, Toyohashi, Aichi, 441-8580 Japan
PHONE: +81-532-44-6577 FAX: +81-532-44-6557
E-mail: press@office.tut.ac.jp

The leader of the research team, Associate Professor Takeshi Kawano said “Although we demonstrated the preliminary results of our NTE device, the batch fabrication of such intracellular electrodes, which have a needle length more than 100 μm , should lead to an advancement in the device technologies. This will eventually lead to realization of multisite, depth-intracellular recordings for biological tissues, including brain slices and brain *in vivo*, which are beyond the capability of conventional intracellular devices.”

As addressed by the research team, the NTE has the potential to be used in cells that are deep within a biological tissue, including brain slice and brain *in vivo*, thus accelerating the understanding of the brain.

Funding agency:

This work was supported by Grants-in-Aid for Scientific Research (S) (No. 20226010), (A) (No. 25249047), for Young Scientist (A) (No. 26709024), (B) (No. 22760251), and the PRESTO Program from JST. Yoshihiro Kubota was supported by the Leading Graduate School Program R03 of MEXT. Rika Numano was also supported by a Grant-in-Aid for Scientific Research (C) (No. 24590350), the Asahi Glass Foundation and the Takeda Science Foundation.

Reference:

Yoshihiro Kubota, Hideo Oi, Hirohito Sawahata, Akihiro Goryu, Yoriko Ando, Rika Numano, Makoto Ishida, and Takeshi Kawano (2016). Nanoscale-tipped high-aspect-ratio vertical microneedle electrodes for intracellular recordings, *Small*, Article first published online: 8 April 2016 | DOI: 10.1002/sml.201600172

Further information

Toyohashi University of Technology

1-1 Hibarigaoka, Tempaku, Toyohashi, Aichi Prefecture, 441-8580, JAPAN

Inquiries: Committee for Public Relations


E-mail: press@office.tut.ac.jp

Toyohashi University of Technology founded in 1976 as a National University of Japan is a research institute in the fields of mechanical engineering, advanced electronics, information sciences, life sciences, and architecture.

Website: <http://www.tut.ac.jp/english/>



Figure 1:

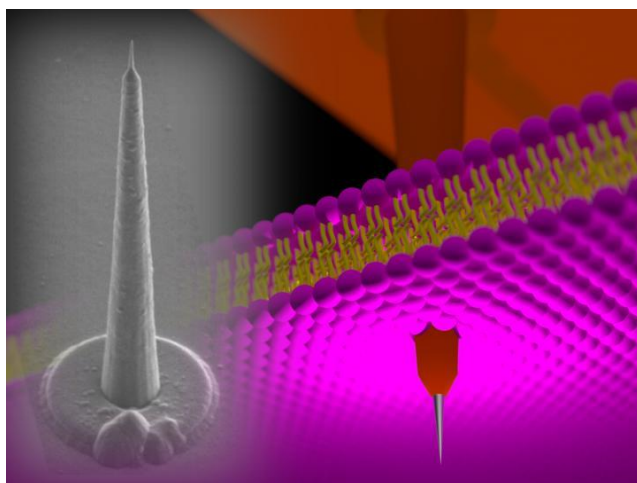

Caption: 120- μm -height 'nanotower' electrode punching a cell membrane. Silicon growth technology and three-dimensional nano/microfabrication techniques realize such high-aspect-ratio intracellular electrodes.

Keywords: ELECTRICAL ENGINEERING/ELECTRONICS, MECHANICAL ENGINEERING, NANOTECHNOLOGY/MICROMACHINES, SUPERCONDUCTORS/SEMICONDUCTORS, TECHNOLOGY/ENGINEERING/COMPUTER SCIENCE