



# TOYOHASHI UNIVERSITY of TECHNOLOGY

Tempaku-cho, Toyohashi, Aichi, 441-8580 Japan

PHONE: +81-532-44-6577 FAX: +81-532-44-6557

E-mail: [press@office.tut.ac.jp](mailto:press@office.tut.ac.jp)

## PRESS RELEASE

Source: Toyohashi University of Technology, Japan, Committee for Public Relations

**Release Title:** Trying to listen to the signal from Neurons

**Release Subtitle:** Improved quality of neural recording using a 'coaxial' microneedle-electrode

### Overview

Associate Professor Takeshi Kawano, Department of Electrical and Electronic Information Engineering, Toyohashi University of Technology (TUT) and the research team at the Electronics-Inspired Interdisciplinary Research Institute (EIIRIS) have developed a coaxial cable-inspired needle-electrode with the diameter of less than 10  $\mu\text{m}$ , using crystal growth of semiconducting material of silicon. The microscale coaxial needle-electrode has two electrodes in the needle, enabling differential recordings to be made at very close distances, a task that had previously been difficult with conventional electrode devices. In addition, the microscale electrode reduces tissue damage compared to conventional electrodes. These advantages of the coaxial electrode enable high-quality recording of neuronal signals that could not be realized with conventional ways, and it is expected that the coaxial needle-electrode can be used as a new way of electrophysiology in the field of neuroscience.

### Details

Neuronal signals can be detected by penetrating a fine electrode into the brain tissue. They are a very important technology for electrophysiological recording in the brain tissue, and by taking the advantage of high spatial resolution it is possible to gain detailed information about neuronal activity. For example, in brain-machine interface (BMI) technology—a technique that allows a patient to move their prosthetic arm or leg using signals from their brain—the technology used to implant the electrodes in the patient's brain and record the neuronal signals with high spatial resolution is very important. It is also important to maintain a high signal-to-noise ratio when recording the signals. Electrical signals from neurons are extremely small, on the order of tens of  $\mu\text{V}$  (1/100,000 of 1 V), and the quality of the signal deteriorates due to noise propagating in the tissue space. This means that electrode devices must have high spatial resolution and be highly resistant to noise. Furthermore, an electrode geometry of 10  $\mu\text{m}$  or less is required in order to avoid damage to the brain tissue.

To solve these challenges relating to the electrodes, the research team used the vapor-liquid-solid (VLS) growth method—a silicon growth technology—to develop a needle-like electrode device having closely positioned two electrodes in the < 10- $\mu\text{m}$ -diameter needle, something that has never been achieved before. The team used an electrode device fabricated in this way to perform local-differential recording of neuronal activity with the two electrodes spaced 6  $\mu\text{m}$  apart. As a result, the team achieved high-quality



# TOYOHASHI UNIVERSITY of TECHNOLOGY

Tempaku-cho, Toyohashi, Aichi, 441-8580 Japan

PHONE: +81-532-44-6577 FAX: +81-532-44-6557

E-mail: [press@office.tut.ac.jp](mailto:press@office.tut.ac.jp)

neuronal signal acquisition with a high signal-to-noise ratio for the first time in the world.

Shinnosuke Idogawa, a PhD student at TUT and the lead author, commented, "In order to achieve the proposed local-differential recording, we proposed a coaxial cable-inspired microneedle-electrode. This coaxial electrode enables to dramatically reduce the electrode spacing to 6  $\mu\text{m}$  compared to, for example, around 200  $\mu\text{m}$  electrode spacing where conventional needle electrodes are arranged side by side. Furthermore, by performing local-differential recording with these two electrodes, we were able to reduce noise during the recording. In addition, because of the tiny needle electrode with the diameter of less than 10  $\mu\text{m}$ , we are able to reduce tissue damage compared to conventional electrodes with diameters of 50  $\mu\text{m}$  or more. Consequently, we have developed an electrode device that can record neuronal signals with high-quality and low invasiveness.

The research team believes it will be necessary to verify whether the proposed coaxial electrode can give stable recordings over a long period of time, and to evaluate tissue damage. Through this work, the research team are aiming to realize high-quality neuronal signal acquisition that has never been achieved before, and hope that the electrode device technology will be used not only for basic research in neuroscience but also for medical applications, including BMI technology and treatments of various brain diseases.

The research team has indicated that a new method to estimate, from pupillary response, the ability to hear and distinguish English based on these research results could lead to the construction of a system wherein the distinction between L and R which Japanese are not good at, can be efficiently studied. Furthermore, it is known that learning difficulties caused by the distinguishing of sounds that do not exist in the native language also occur when an English speaker learns Chinese. Ultimately, we hope that this will become a new indicator of estimating language ability that is not limited to Japanese. In addition, these research results are expected to be useful for language learning in patients with movement disorders and speech disorders as there is no need for the participants to pay attention to or physically respond to English words.

## Reference

Shinnosuke Idogawa, Koji Yamashita, Yoshihiro Kubota, Hirohito Sawahata, Rioki Sanda, Shota Yamagiwa, Rika Numano, Kowa Koida, and Takeshi Kawano (2020). Coaxial microneedle-electrode for multichannel and local-differential recordings of neuronal activity. *Sensors and Actuators B: Chemical*, 10.1016/j.snb.2020.128442.



## Further information

Toyohashi University of Technology

1-1 Hibarigaoka, Tempaku, Toyohashi, Aichi Prefecture, 441-8580, JAPAN


Inquiries: Committee for Public Relations

E-mail: [press@office.tut.ac.jp](mailto:press@office.tut.ac.jp)

Toyohashi University of Technology founded in 1976 as a National University of Japan is a research institute in the fields of mechanical engineering, advanced electronics, information sciences, life sciences, and architecture.

Website: <https://www.tut.ac.jp/english/>

Figure:

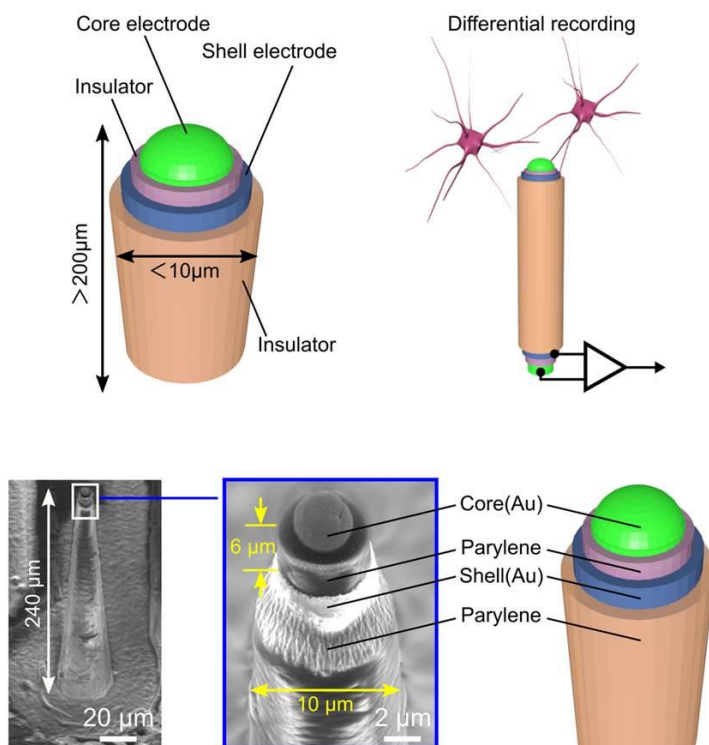

Title: Coaxial cable–inspired microneedle electrode for neural recording

Caption: Local-differential recording of neuronal activities (top) Fabricated coaxial needle-electrode (bottom)

Keywords: ELECTRICAL ENGINEERING/ELECTRONICS, NANOTECHNOLOGY/MICROMACHINES, TECHNOLOGY/ENGINEERING/COMPUTER SCIENCE