

PRESS RELEASE

Source: Toyohashi University of Technology, Japan, Committee for Public Relations

Release Title: Elucidation of Electrolyte Decomposition Behavior in All-Solid-State Lithium-Sulfur Batteries

Release Subtitle: Accelerating interface design for improved performance

Overview

A research group of the Department of Electrical and Electronic Information Engineering at Toyohashi University of Technology – consisting of Hiro tada Gamo, a doctoral course student; Kazuhiro Hikima, assistant professor; and Atsunori Matsuda, professor – has elucidated the decomposition behavior of electrolytes in the cathode composites of all-solid-state lithium-sulfur batteries (ASSLSB). It was found that the sulfide solid electrolytes in the ASSLSB's cathode composites were converted into thiophosphates with long-chain cross-linked sulfur through the charging and discharging cycle. These decomposition products govern the overall battery performance of ASSLSBs. The study was published online in the Chemistry of Materials on December 15, 2022.

(<https://pubs.acs.org/doi/abs/10.1021/acs.chemmater.2c02926>)

Details

Currently, electric vehicle (EV) market is expanding and thus require the development of better onboard storage batteries. ASSLSBs are expected to become next-generation high-energy-density batteries owing to the use of high-capacity cathode active materials, such as sulfur (S) and lithium sulfide (Li_2S). In order to ensure that ASSLSBs offer optimal performance, robust ion and electron conduction pathways must be established within the cathode composites, which are comprised of cathode active materials with sulfide solid electrolytes and a conductive agent (carbon material). However, battery performance is presently limited due to insufficient ionic conduction pathways provided by the sulfide solid electrolytes in the cathode composite. Also, sulfide solid electrolytes cause the oxidative decomposition within the ASSLSB's operating voltage. Excessive decomposition of solid electrolytes results in the loss of ionic conduction pathways within the cathodes, and thus to degraded capacity. It is therefore important to understand the decomposition behavior of sulfide solid electrolytes in cathode composites in order to improve ASSLSB performance. In according to previous reports, sulfide solid electrolytes are converted into redox-active decomposition products after the oxidation decomposition, which show reversible redox reactions. However, how sulfide solid electrolytes decompose in ASSLSBs remains unclear.

Accordingly, the research team used planetary ball milling to mix Li_2S as the cathode active material, Li_3PS_4 as the sulfide solid electrolyte, and carbon material to fabricate the cathode composite; on which they then conducted electrochemical measurements and Raman spectroscopy, and analyzed how the

electrolyte in the cathode composite of the ASSLSBs decomposed during charging and discharging. Basic electrochemical measurements revealed that redox reactions in ASSLSBs include the oxidative decomposition of Li_3PS_4 and redox reactions of its decomposition products, as well as redox reactions of the cathode active materials. After prolonged repetition of these cycles, the cathode active materials lost their electrochemical activity, and only the redox reactions of Li_3PS_4 decomposition products remained evident. This demonstrates that the long-term performance of ASSLSBs is governed by the electrochemical redox activity of Li_3PS_4 decomposition products. Raman spectroscopy on the cathode composite after 20 cycles revealed a peak derived from a S-S bond. These experiments demonstrated that the cathode active materials react with the sulfide solid electrolytes in ASSLSBs during the charging and discharging cycle to form thiophosphates with long-chain cross-linked sulfur.

Future Outlook

Through this research, we established how the decomposition of the sulfide solid electrolyte governs the overall performance of ASSLSBs, and demonstrated how important it is to control the interface between the cathode active materials and the solid electrolyte. Going forward, we would like to establish guidelines for interface design to suppress decomposition reactions of sulfide solid electrolytes in the cathode composite based on these research results.

Reference

Hirotada Gamo, Kazuhiro Hikima, Atsunori Matsuda (2022). Understanding Decomposition of Electrolytes in All-Solid-State Lithium-Sulfur Batteries.

Chemistry of Materials, [10.1021/acs.chemmater.2c02926](https://doi.org/10.1021/acs.chemmater.2c02926).

This research was made possible with a Grant-in-Aid for JSPS Fellows (JP21J12809).

Further information

Toyohashi University of Technology


1-1 Hibarigaoka, Tempaku, Toyohashi, Aichi Prefecture, 441-8580, JAPAN

Inquiries: Committee for Public Relations

E-mail: press@office.tut.ac.jp

Toyohashi University of Technology founded in 1976 as a National University of Japan is a research institute in the fields of mechanical engineering, advanced electronics, information sciences, life sciences, and architecture.

Website: <https://www.tut.ac.jp/english/>

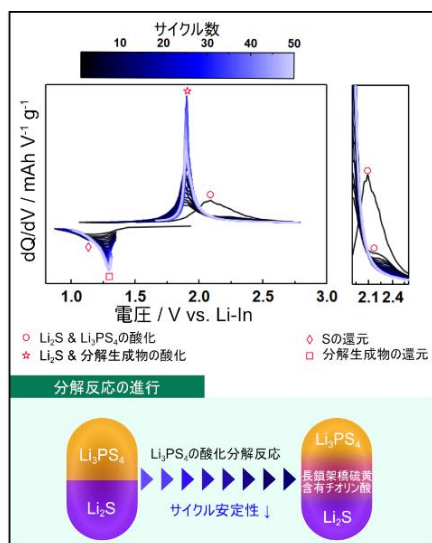

Title: Science of redox reactions in all-solid-state lithium-sulfur batteries

Caption: Redox peak based on differential capacity curve of all-solid-state lithium-sulfur batteries (above)

Decomposition of solid electrolytes in cathode composites (below)

Keywords: Solid electrolytes, Cathodes